

TKG-104-TOUCH-IP68-GREY

**INDUPROOF™**  
Advanced



**InduKey®**  
Industrial Input Devices

**TECHNICAL SPECIFICATION KEYBOARD**

Number of keys: 102 + 2 Mousebuttons  
 Keyswitch technology: gold-on-gold domes  
 Actuation force: 1.0 N  
 Actuation travel: 0.55 mm  
 Keyswitch lifetime: ca. 1 mill. operations  
 Protection class (max): IP68  
 Mounting type: desktop  
 Material (surface): silicone  
 Material (bottom panel): plastic  
 Interface: PS/2; USB

**PROPERTIES**

Weight: 800 g  
 Cable length: ca. 1.80 m  
 Operating temp. range: 0 °C bis +70 °C  
 Storage temp. range: -25 °C bis +80 °C

**TECHNICAL SPECIFICATION TOUCHPAD**


Operating principle: capacitive  
 Resolution: max. 500 dpi  
 Dimension: 65 x 59 mm  
 Sensing area: 59 x 42 mm

**DIMENSION KEYBOARD**

Length: 340.0 mm  
 Width: 165.0 mm  
 Height: 16.3 mm

**FEATURES**

- Rear side equipped for VESA mount (75 x 75 mm) with „push-out“ insert nuts for installing bolts
- Key for switching „off“ the keyboard during a cleaning process

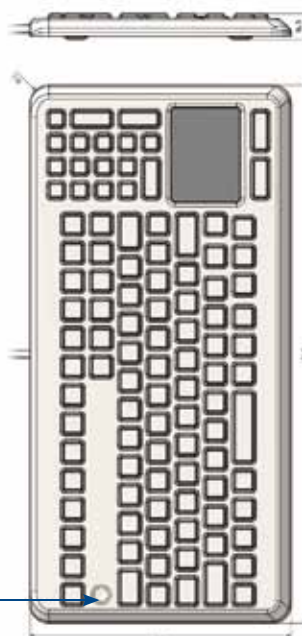

Order info:		Interface		Layout	
		PS/2	USB	DE	US
KG17223	TKG-104-TOUCH-IP68-GREY-PS/2-DE	•		•	
KG17224	TKG-104-TOUCH-IP68-GREY-PS/2-US	•			•
KG17201	TKG-104-TOUCH-IP68-GREY-USB-DE		•	•	
KG17241	TKG-104-TOUCH-IP68-GREY-USB-FR (AZERTY France)				

Other language versions / interfaces / configurations available on request.