

TKG-104-MB-IP68-GREY

**INDUPROOF™**  
Advanced



**InduKey®**  
Industrial Input Devices

### TECHNICAL SPECIFICATION KEYBOARD

Number of keys: 102 + 2 Mousebuttons  
 Keyswitch technology: gold-on-gold domes  
 Actuation force: 1.0 N  
 Actuation travel: 0.55 mm  
 Keyswitch lifetime: ca. 1 mill. operations  
 Protection class (max): IP68  
 Mounting type: desktop  
 Material (surface): silicone  
 Material (bottom panel): plastic  
 Interface: PS/2; USB

### PROPERTIES

Weight: 800 g  
 Cable length: ca. 1.80 m  
 Operating temp. range: -20 °C to +70 °C  
 Storage temp. range: -25 °C to +80 °C

### TECHNICAL SPECIFICATION MOUSECURSOR


Operating principle: Hall-sensor  
 Resolution: 800 dpi

### DIMENSION KEYBOARD

Length: 340.0 mm  
 Width: 165.0 mm  
 Height (with Mousebutton): 18.4 mm

### FEATURES

- Rear side equipped for VESA mount (75 x 75 mm) with „push-out“ insert nuts for installing bolts
- Key for switching „off“ the keyboard during a cleaning process

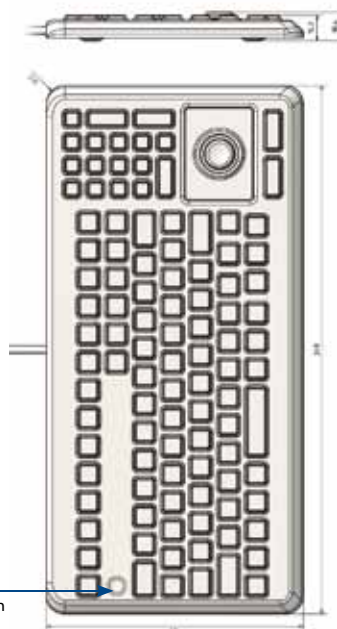

On/Off-Switch

Order info:		Interface		Layout	
		PS/2	USB	DE	US
Cat.-No.	Product name				
KG17225	TKG-104-MB-IP68-GREY-PS/2-DE	•		•	
KG17226	TKG-104-MB-IP68-GREY-PS/2-US	•			•
KG17203	TKG-104-MB-IP68-GREY-USB-DE		•	•	
KG17253	TKG-104-MB-IP68-GREY-USB-FR (AZERTY France)				

Other language versions / interfaces / configurations available on request.